

PROVISIONAL TDS

2K100 Two-Component Polyurethane Coating

2K100 is a high performance two-component, VOC-free conformal coating, designed specifically for selective coating processes. 2K100 is characterised by greater coating thickness and enhanced edge coverage and shows extreme flexibility, outstanding solvent resistance and extremely low stress on components.

- Extremely hydrophobic; excellent resistance to humidity, condensation and immersion in water
- Soft coating; provides low stress during typical automotive thermal shock cycles
- Resistant to a wide variety of solvents and chemicals
- High coating thickness achievable; enhanced edge coverage

Approvals

RoHS-2 Compliant (2011/65/EU):
REACH Compliant:
IPC-CC-830:
BMW GS95011-5:

Yes
Yes
Meets Requirements
Meets Requirements

Liquid Properties

Appearance:	Pale coloured liquid
Density @ 20°C:	1.05 g/ml (mixed)
Flash Point:	>100°C
Solids Content:	100%
VOC Content:	0g/L
Mix Ratio:	5:1 by volume
Viscosity (mixed) @ 25°C:	1500-2000
Useable Life @ 20°C:	40 Minutes
Touch Dry Time at 20°C:	240 Minutes
Recommended Drying Time:	10 Minutes @ 80°C

Dry Film Coating

Colour:	Pale yellow/amber
Recommended Coating Thickness:	100-300µm
Temperature Range:	-40 to +100°C
Thermal Shock Range:	-65 to +125°C
Thermal Shock (1000 cycles):	No cracking, blistering or delamination
Softening Temperature	>125°C
Shore Hardness:	A40-50
Glass Transition Temperature (T _g)	-30°C (DMA)
Elongation at Break (ASTM D638 IV)	250-300%
Elastic Modulus	122 MPa @ -40°C 2 MPa @ 25°C 10 KPa @ 125°C

Copyright Electrolube 2013

All information is given in good faith but without warranty. Properties are given as a guide only and should not be taken as a specification.

Electrolube cannot be held responsible for the performance of its products within any application determined by the customer, who must satisfy themselves as to the suitability of the product.

Ashby Park, Coalfield Way,
 Ashby de la Zouch,
 Leicestershire LE65 1JR

T +44 (0)1530 419 600


F +44 (0)1530 416 640

BS EN ISO 9001:2008
 Certificate No. FM 32082


Tensile Strength	1MPa @ 25°C
Dielectric Strength:	90 kV/mm
Dielectric Constant:	2.5
Surface Insulation Resistance:	$1 \times 10^{15} \Omega$
Comparative Tracking Index:	> 600 Volts
Dissipation Factor @ 1MHz, 25°C:	0.01
Moisture Resistance (IPC-CC-830):	$1.63 \times 10^{10} \Omega$

Additional Data

2K100 shows outstanding resistance to common solvents, maintaining its initial tensile strength and a large degree of its elongation at break or elasticity.

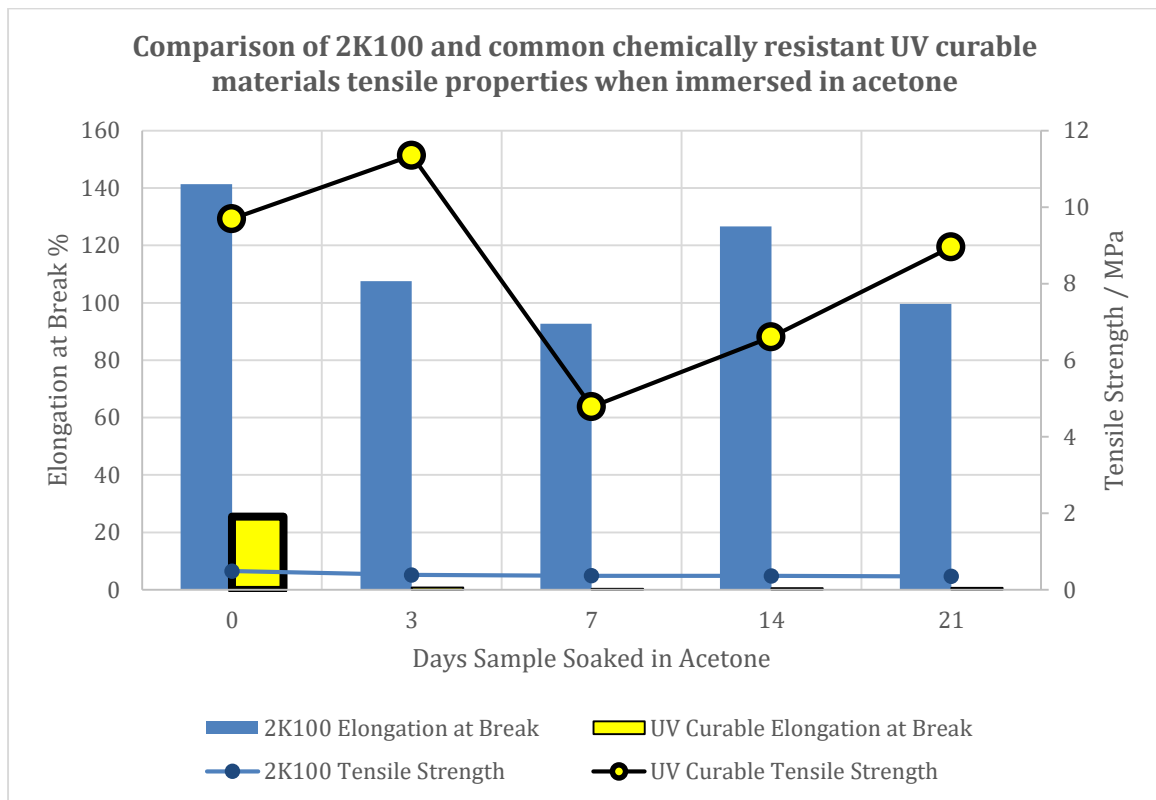

2K100 shows excellent resistance to hydrolysis by immersion in an 80°C hot water bath, maintaining a large degree of its elongation and showing little change in tensile strength.

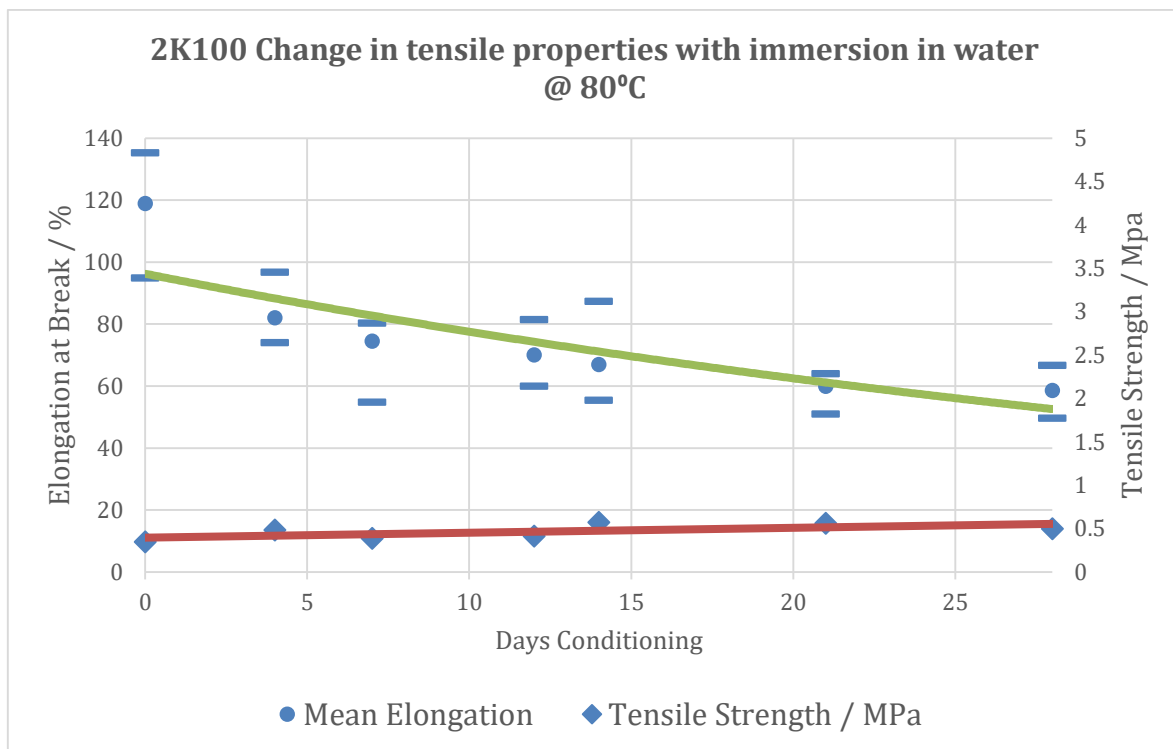

Directions for Use

2K100 is intended to be applied by selective spray coating. It is recommended that the use of a high accuracy, volumetric metering system, such as progressive cavity pumps are used to control the mix ratio of the two components. It is recommended that a 10 turn static mixer is used to ensure complete mixing of the two components prior to reaching the dispense valve. The use of a heated recirculation system, or heated applicator block can result in reduced film builds and faster cycle times. 60°C is a typical set-point.

The material works best when a relatively high flow rate and low atomising air combination is used, but this will depend on the design of the assembly, required cycle times and other process considerations.

Inspection

2K100 contains a UV trace, which allows inspection of the PCB after coating to ensure complete and even coverage; the stronger the reflected UV light, the thicker the coating layer is. UV light in the region of 375nm should be used for inspection.

Revision 0: Nov 2015